

**KARROW AVENUE
RECONSTRUCTION PROJECT**




Karrow Avenue Roadway Reconstruction Project

Welcome!

Public Meeting No. 2

February 1, 2024





KARROW AVENUE RECONSTRUCTION PROJECT



Karrow Avenue Roadway Reconstruction Project

Project Contacts


City of Whitefish

- Craig Workman, PE, Public Works Director
- Karin Hilding, PE, Engineering & Sustainability Project Manager
- Tammy Omundson, Office Manager

Robert Peccia & Associates (RPA) – Consulting Engineers

- Ryan Mitchell, PE, PLS, Senior Project Manager
- Austin Pauly, EI, Project Designer
- Chris Brazda, EI, Engineering Designer / Construction Technician (not present)





**KARROW AVENUE
RECONSTRUCTION PROJECT**




Karrow Avenue Roadway Reconstruction Project

Meeting Outline

- Project Schedule
- Roadway Design & Typical Section
- Street Lights
- Review of Traffic Control & Detour Plan
- Public Input





KARROW AVENUE RECONSTRUCTION PROJECT



Spring
2023

- ~~Data Gathering~~
- ~~Site Survey~~

Summer
2023


- ~~Project Development~~
- ~~Preliminary Engineering~~
- ~~Newsletter #1 (August 2023)~~

Fall
2023

- ~~Design Engineering~~
- ~~Newsletter #2 & Public Meeting #1 (September 2023)~~
- ~~City Council / Public Meeting, for approval of Recommended Design and Authorization to Bid~~



CIVIL ENGINEERING / PLANNING / SURVEYING



KARROW AVENUE RECONSTRUCTION PROJECT



Winter
2023 / 2024

- Final Design
- Newsletter #3 & Public Meeting #2 (February 2024)


Spring
2024

- Advertising & Bidding (March 2024)
- Contractor Selected
- Newsletter #4 & Public Meeting #3 (April 2024)

Summer / Fall
2024

- Construction Phase
- Traffic Detours





KARROW AVENUE RECONSTRUCTION PROJECT



Karrow Avenue Roadway Reconstruction Project


Roadway Design & Typical Section

- 12-foot wide drive lanes w/ 2-foot curbs
- 5- to 10-foot wide grass boulevard
 - Most of roadway is 6-foot boulevard
- 8-foot wide concrete path
 - City has committed to perform snow removal along this section of path



New Storm Drain System



Utility Extensions & Stub-outs




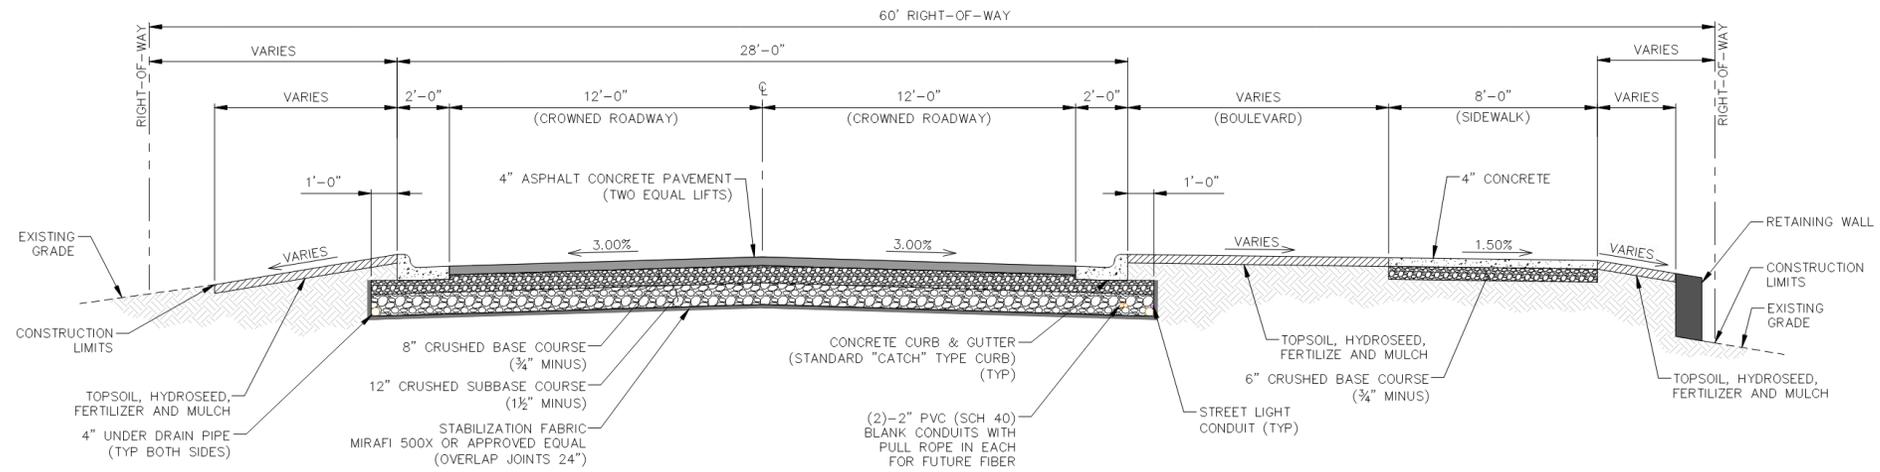


TYPICAL ROADWAY SECTION A
 SCALE: NONE

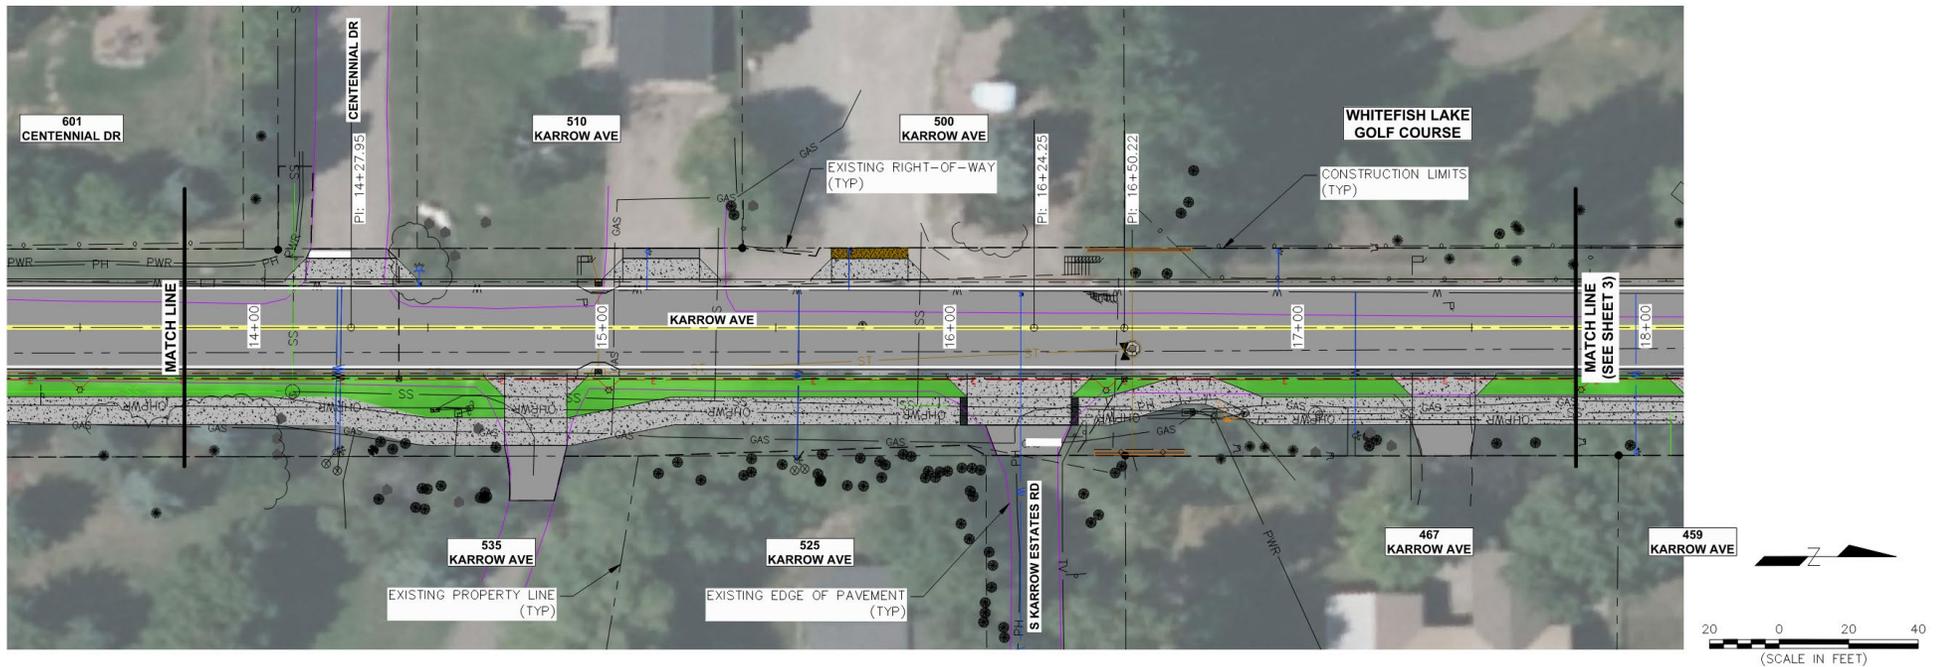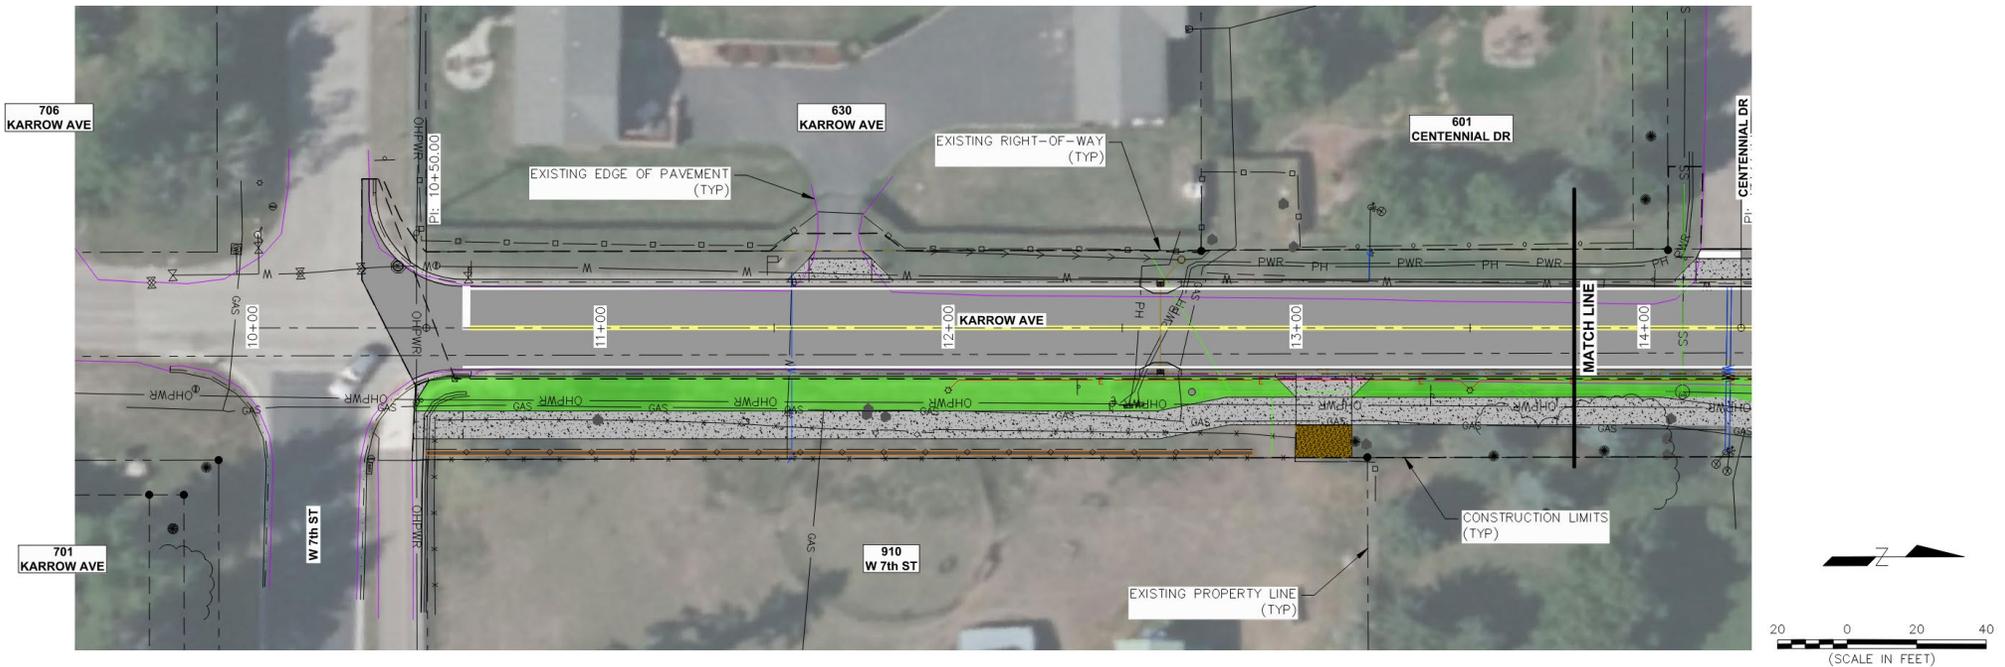

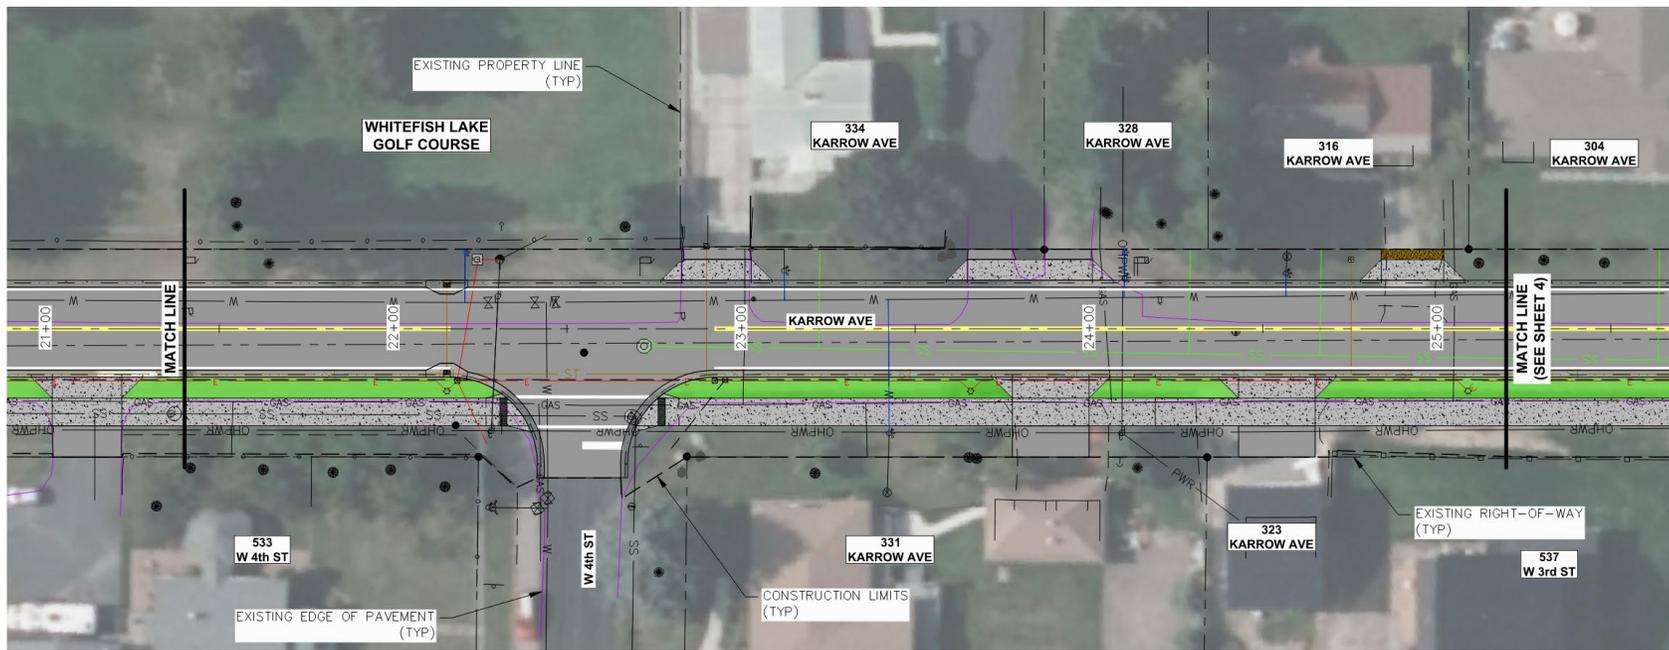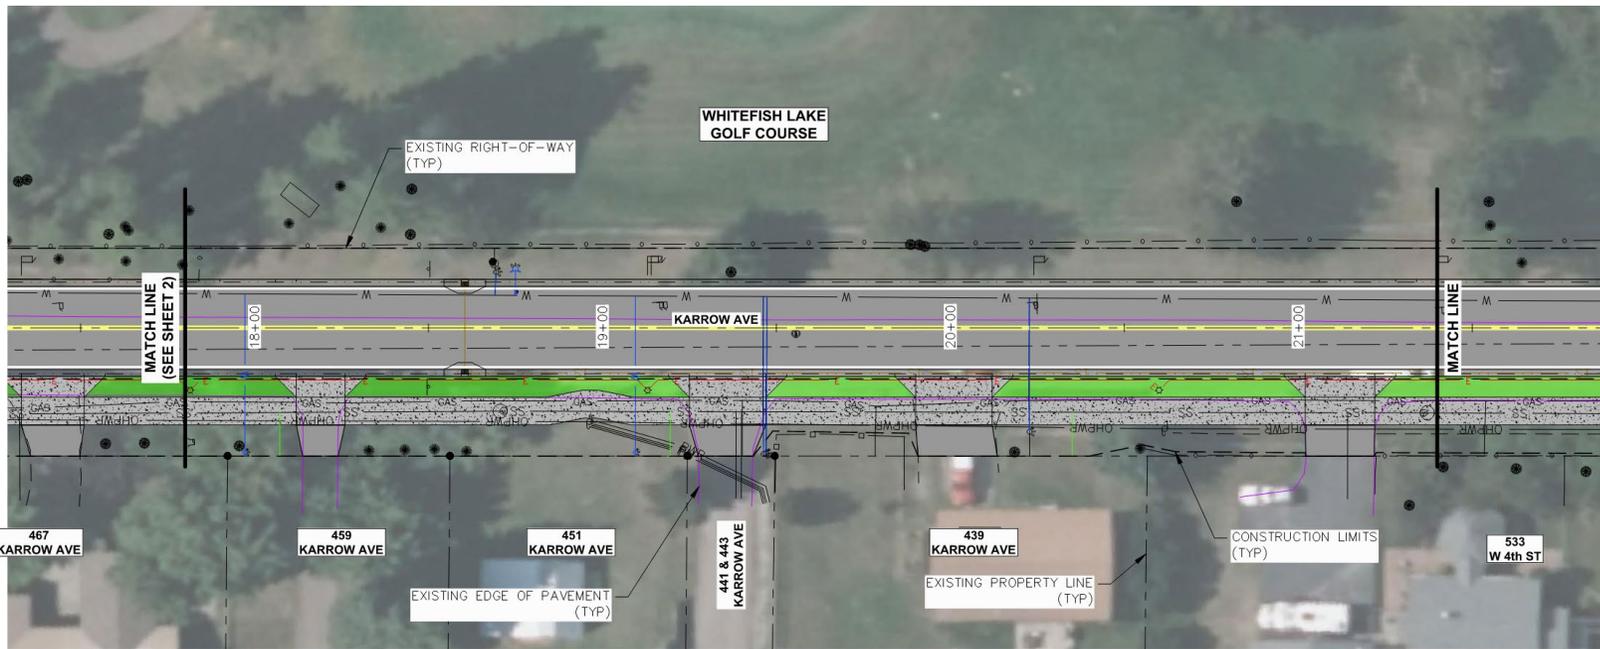

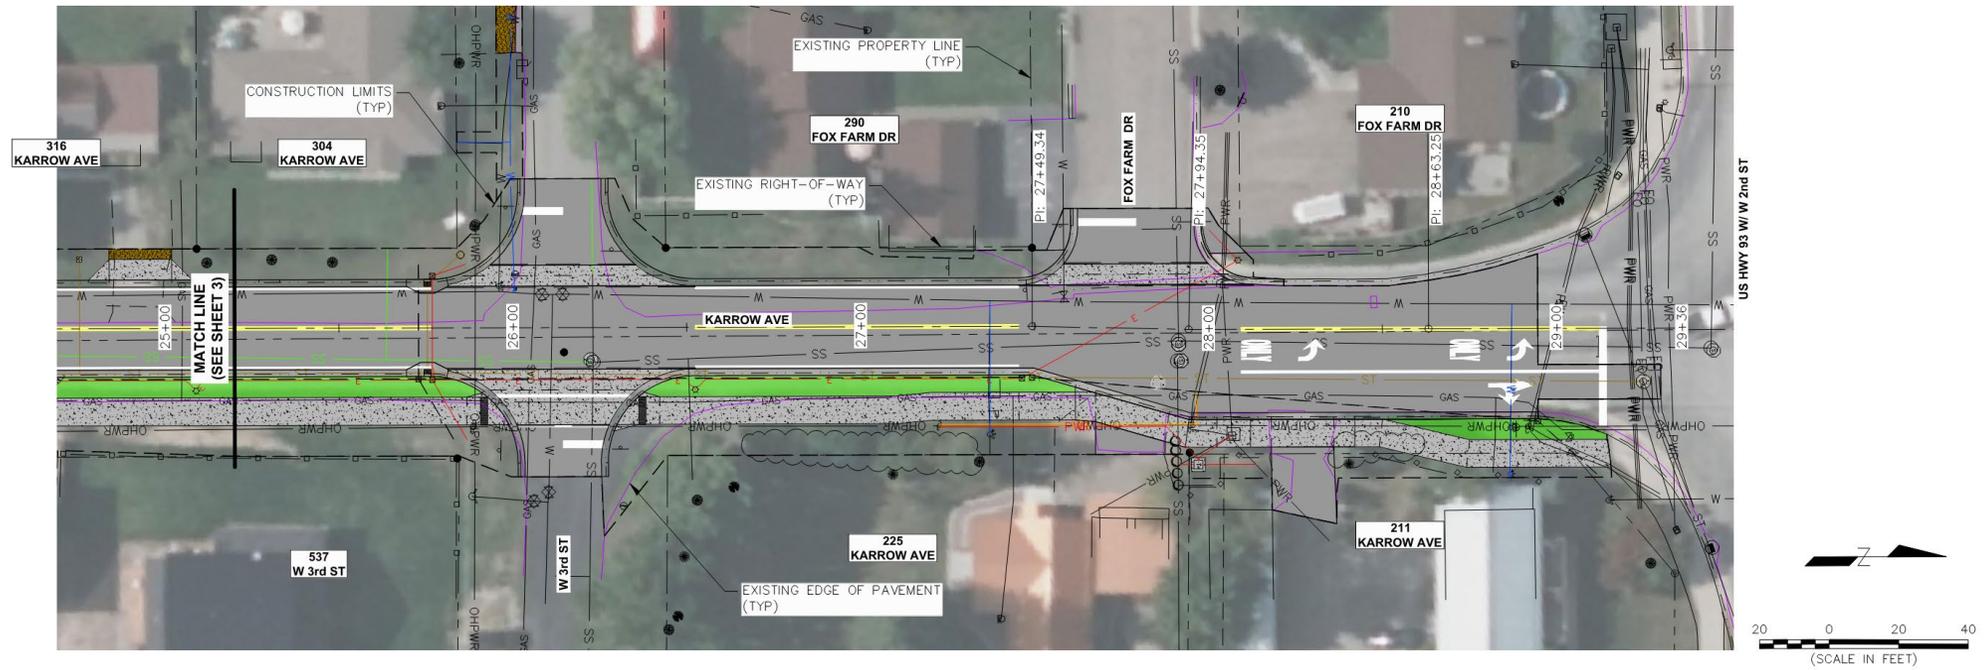

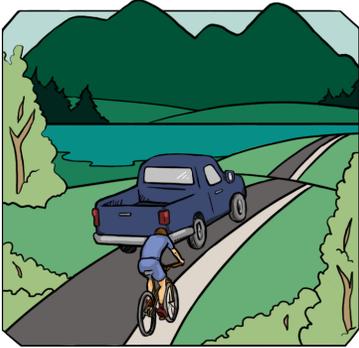

KARROW AVENUE RECONSTRUCTION PROJECT




Street Lighting


- City standard street lights will be installed.
- Street lights are typically spaced every 150-180 feet.
- Street lights are typically spaced at intersection and at mid block locations.
- Street lights have house side shields to minimize light trespass.
- Street lights are dark sky compliant.




City Standard Street Light

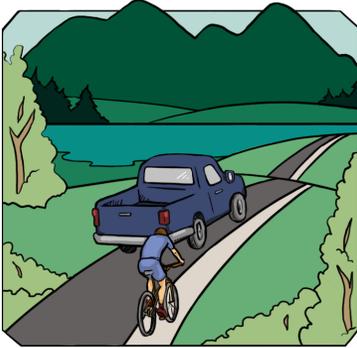

**KARROW AVENUE
RECONSTRUCTION PROJECT**

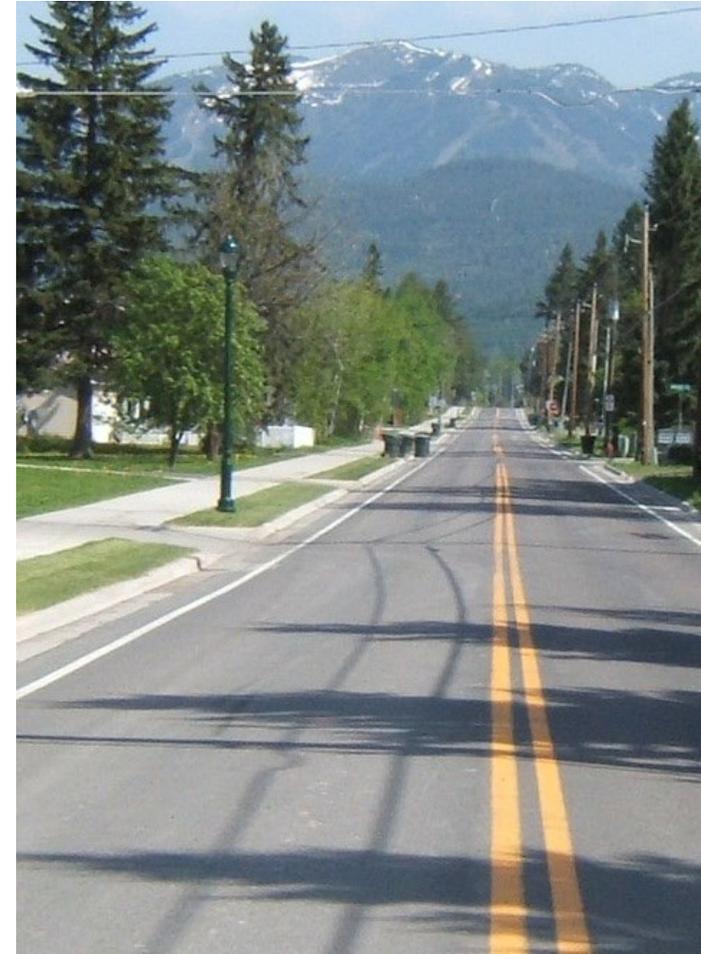

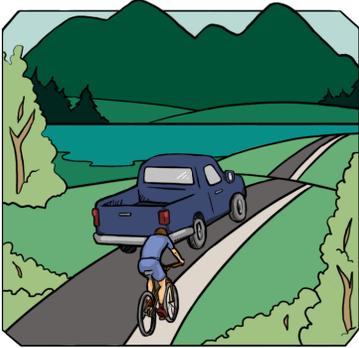

KARROW AVENUE RECONSTRUCTION PROJECT



Let Us Hear From You!

Existing Issues/Concerns

- Tell us about any existing issues or concerns you may have.

Email Distribution List

- Forward us your email address to receive project updates via email.

Comments

- Please email us at (apauly@rpa-hln.com) any comments you may have. Questionnaire can be found on the City of Whitefish “Current Projects” Public Works Department webpage.

